
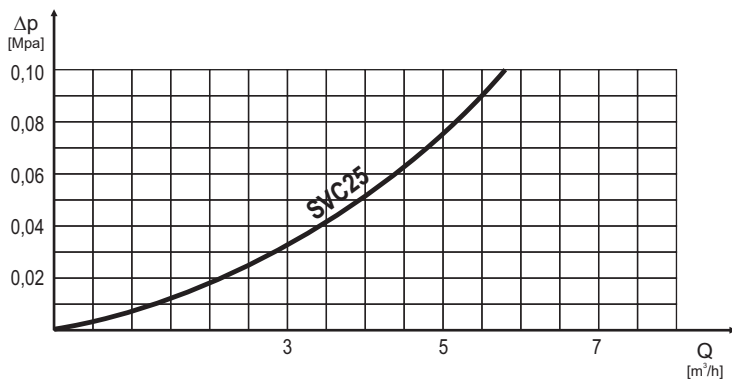


<b>SVC25</b>	
$Q_p$	2,5 m <sup>3</sup> /h
$Q_{min}$	50 l/h
$Q_s$	5 m <sup>3</sup> /h
$Q_t$	200 l/h
Klasse / Class / Classe / Klasse	B
$T_{max}$	90 °C
$p_{max}$	10 bar
Signal / Signal / Signal / Signaal	1 l/imp
Reed Kontakt / Reed contact / Contact reed / Reed contact	24V AC/DC, 0.01 A max
Toleranz / Tolerance / Tolérance / Tolerantie	±5% (≥ 50 l/h, < 200 l/h) ±2% (≥ 200 l/h, < 5 m <sup>3</sup> /h)

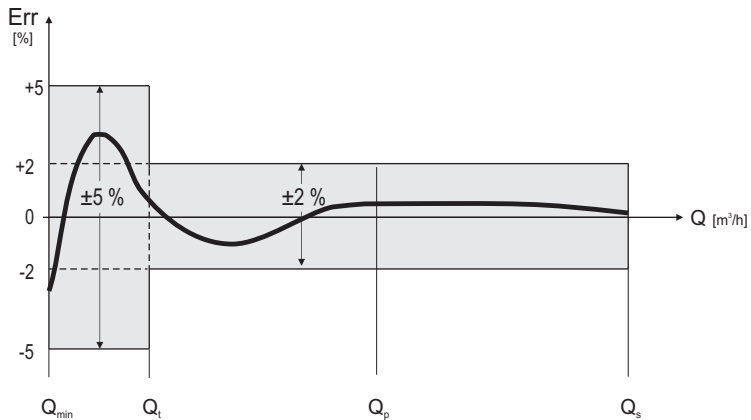

01 MC060437